

AFS 350mm Floor Saw


MODEL		AFS 350 Petrol Honda	AFS 350 Petrol Robin
Motor Power	(hp/kW)	13/9.6	13/9.6
Blade Size	(mm)	350	350
Max Depth of Cut	(mm)	127	127
Dimensions W x H x L	(mm)	500 x 1000 x 1400	500 x 1000 x 1400
Weight	(kg)	95	95

Compact 350mm Floor Saw

MODEL		Compact Petrol Honda	Compact Petrol Robin
Motor Power	(hp/kW)	13/9.6	9.5/7
Blade Size	(mm)	350	350
Max Depth of Cut	(mm)	127	127
Dimensions W x H x L	(mm)	510 x 800 x 800	510 x 800 x 800
Weight	(kg)	96	121

Cutlass 450mm Floor Saw

MODEL		Cutlass Petrol Honda	Cutlass Diesel Robin
Motor Power	(hp/kW)	13/9.6	9.5/7
Blade Size	(mm)	450	450
Max Depth of Cut	(mm)	165	165
Dimensions W x H x L	(mm)	520 x 990 x 950	520 x 990 x 950
Weight	(kg)	122	132



C O N C R E T I N G • C O M P A C T I O N • S A W I N G • P O W E R

Belle Group Head Office: Sheen nr Buxton Derbyshire SK17 0EU GB	Tel: +44 (0)1298 84606	Fax: +44 (0)1298 84722	email: sales@belle-group.co.uk
Belle Group Willersey: Willersey Ind. Est. Willersey Worcs WR12 7RR GB	Tel: +44 (0)1386 858482	Fax: +44 (0)1386 858378	email: sales@panther-ltd.com
Belle Group Parts Centre: Bode Business Park Unit 5 Ball Haye Green Leek Staffs ST13 6BW GB	Tel: +44 (0)1538 380000	Fax: +44 (0)1538 380038	email: spares@belle-group.co.uk
Belle Group Europa: 4711 NC ST Willebrord NETHERLANDS	Tel: +31 (1)65 38 2808	Fax: +31 (1)65 38 2809	email: sales@belle-group.co.uk
Belle Group France: 94022 Creteil Cedex FRANCE	Tel: +33 (1)49 81 68 32	Fax: +33 (1)43 39 94 40	email: sales@belle-group.co.uk
Belle Equipos: Calle Doctor Calero 19 Centro TUTTI local 22 28220-Majadahonda (Madrid) SPAIN	Tel: +34 91 6362043	Fax: +34 91 6341535	email: belleequipos@belleequipos.com
Belle Group Inc.: P.O. Box 13225 321 Tazewell Ave. SE Roanoke VA 24032 USA	Tel: +1 (540) 345-5090	Fax: +1 (540) 345-5091	email: bellegroupinc@aol.com
Belle Poland Ltd.: ul. Tomaszowska 26 96-200 Rawa Mazowiecka near Warsaw POLAND	Tel: +48 0-46 814-40-91, 92	Fax: +48 0-46 814-47-00	email: sales@belle-group.co.uk

www.belle-group.co.uk

Belle Group reserve the right to amend or improve any specifications in this brochure without notice.

820-SAW-GB

sawing

floor saws



sawing

First Choice for Floor Saws...



AFS 350


350 mm Advanced Floor Saw

The AFS is built using the same technology as the market leading PC Plate compactors. The design minimises Hand-arm Vibration (HAVS) and maximises productivity. With comfortable operation, enclosed guard and dust suppression, the AFS is the safest saw for operators and bystanders.



Features

- Low Hand-Arm Vibration - minimises the risk of HAVS
- Enclosed blade guard - blade is fully guarded even when raised
- Easily transported with removable handle - (fits in the back of small van)
- Protected blade - the saw can be transported with the blade fitted
- Gas strut depth control - infinite depth of cut control
- Dampened blade lowering - avoids blade damage from shock loading
- Finger tip depth control - good ergonomics, simple operation
- Water dust suppression - for less hazardous and intrusive working
- Long wheel base and fixed frame - increased stability for smoother cutting

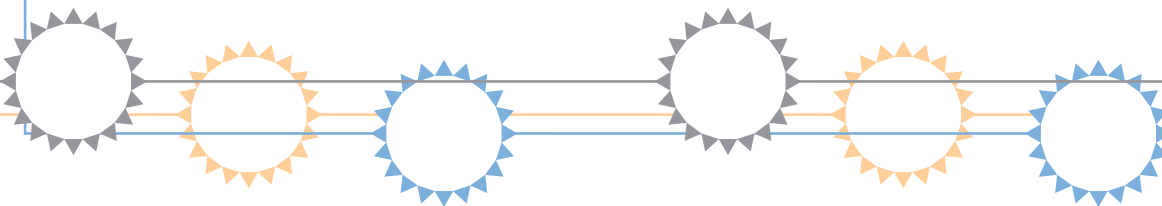

COMPACT

350mm Compact Floor Saw

The low weight and compact size combined with fast cutting speeds make this saw ideal for all floor and road repair work in concrete and asphalt. With the removable water tank it is totally independent of other equipment and is very practical for remote sites.

Features

- Easily transported (fits in the back of small van)
- Specially moulded 25 litre detachable water tank
- Effective dust suppression, vital in built up areas
- Foot operated depth adjustment for speed, simplicity and safety
- Maximum power transmission with 4 belts
- Adjustable handle height
- Triple sealed bearings
- Robust construction to survive the heaviest contract work
- Lifting frame that protects the engine as standard



CUTLASS

450mm Cutlass Floor Saw

With an integral steel water tank, efficient weight distribution and rugged construction, the Cutlass is a very productive saw for all floor and road applications in concrete and asphalt. Accurate control and good stability ensures smooth cutting and reduces blade wear.

Options: Lifting Frame, Pointer Guide

Features

- Accurate 'Hand Wheel' depth adjustment
- Water from integral tank or direct from mains
- Fully welded steel construction
- Triple sealed shaft bearings
- Wheels inside the line of cut for trench trimming
- Petrol and Diesel options available